



Seawater
IN 3/4"

Seawater
OUT 3/4"

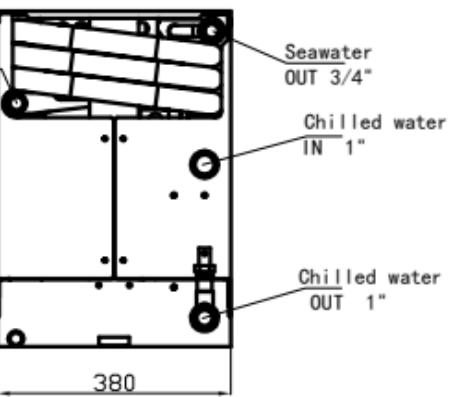

Chilled water
IN 1"

Chilled water
OUT 1"

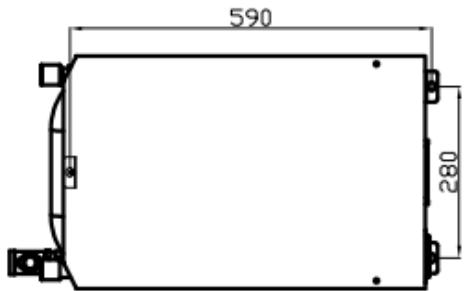

HC80VFD

MODEL

HC80VFD

Cooling Capacity

80 000 BTU

Power Supply

230V/50-60Hz

Refrigerant

R32

Cool/Heat Input

25/28A

Sea Water Flow.

105L/min

Fresh Water Flow.

60L/min

Net Weight

75Kg

MODEL

HC80VFD

Cooling Capacity

80 000 BTU

Power Supply

380V/50Hz

Refrigerant

R32

Cool/Heat Input

10/12A

Sea Water Flow.

105L/min

Fresh Water Flow.

60L/min

Net Weight

75Kg